

System component: DISPLAY CONTROL UNIT_43



- Display and control unit for ITECNET systems
- Color display 4.3 inch with 480 x 272 pixels
- Adjustable brightness
- Particularly sensitive, capacitive touch screen
- Comfortable operation with rotary knob and button
- Free configuration via ITEC Netdesign
- Standard network connection to ITECNET system components
- Can be remotely located up to 100 m from the associated central device
- 24 VDC supply
- Power-over-Ethernet supply possible
- Design 19", 2 HE for installation in standard racks
- Installation option for cinch and XLR sockets (audio, network) for free wiring



Examples of freely configurable interfaces:



Main menu



Volume control




Level indicators



Configuration switch



Status indicators

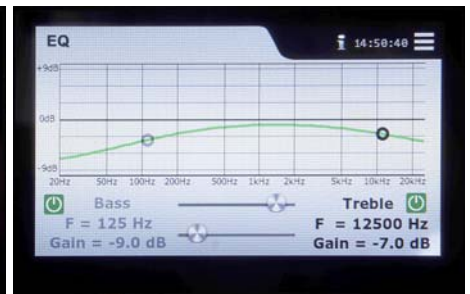

Equalizer

DISPLAY CONTROL UNIT_43 - SPECIFICATIONS



Design	Flush installation in 19" / 2 RU front panel with protective
Power supply	24 VDC (18 V < U < 32 V) on plug-in terminal block
Current consumption	max. 100mA
Power-Over-Ethernet	possible optionally
Network port	Standard Ethernet to RJ45 socket
Operating temperature	-5° C - +40° C
Dimensions	482 mm x 88 mm x 48 mm (W x H x D), 19" / 2 RU
Weight	0.5 kg

All information without guarantee. Subject to technical changes.